



The sturdy rack mount buttons can be installed in the button mount holes on the rack. They can be replaced with the rack mount kit (included with the product) to allow for more versatile mounting angles.

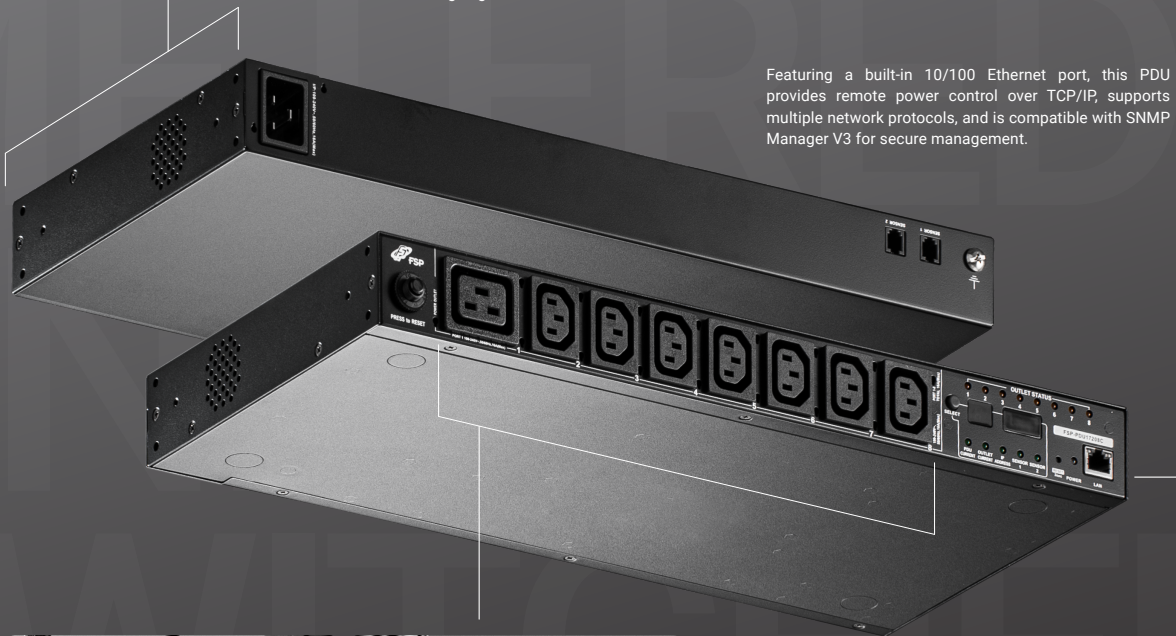

Featuring a built-in 10/100 Ethernet port, this PDU provides remote power control over TCP/IP, supports multiple network protocols, and is compatible with SNMP Manager V3 for secure management.

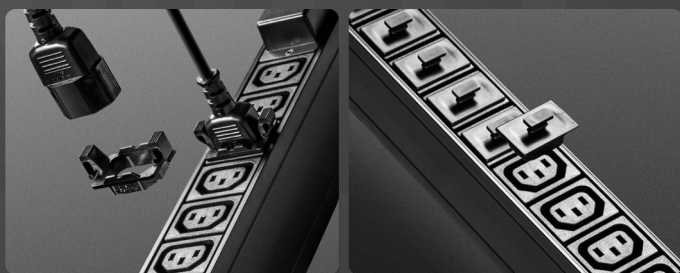

When the slot is not in use, the C13 POWER PLUG SLOT COVER prevents dust, dirt, or other foreign objects from entering the slot, avoiding potential functional issues or short circuits.



FSP-PDU17208C

FSP's new generation of green energy PDUs (FSP-PDU17208C) provides secure, centralized, and intelligent power management for up to 8 IEC outlets—each with an individual LED indicator on the hardware interface. Through a TCP/IP connection, users can remotely power on, off, or cycle devices, with each outlet controllable independently.

FSP-PDU17208C also supports real-time power measurement and third-party v3 SNMP manager software, simplifying multi-device management and providing in-depth power analysis reports. With robust security features and an intuitive interface, FSP-PDU17208C offers an efficient, convenient, and cost-effective way to optimize power usage.



DATA CENTER



SERVER ROOM



NETWORK WIRING CLOSET

*For safety, ensure the equipment is installed near a wall outlet. The disconnection device (appliance coupler for detachable cords or plug for non-detachable cords) must remain easily accessible at all times.



SPECIFICATIONS

ELECTRICAL		FSP-PDU17208C
Nominal Input Voltage		100-240 VAC
Maximum Input Current		16A (Max)
Input Frequency		50-60 Hz
Input Connection		IEC 60320 C20
Input Power		3680VA (Max)
Outlet Type		(7) IEC 60320 C13 (1) IEC 60320 C19
Nominal Output Voltage		100-240 VAC
Maximum Output Current (Outlet)		C13: 10A (Max) C19: 16A (Max)
Maximum Output Current (Bank)		16A (Max)
Maximum Output Current (Total)		16A (Max)
Breakers		1 x 16A Non-Fuse Breaker
Metering		Outlet level Current, Voltage, VA , PF and KWh Monitoring
Outlet Switching		Yes
Environment Sensor Ports		2
Metering Accuracy		Voltage Range: 100VAC - 250VAC +/-1% Power Range: 100W - Maximum Capacity +/- 2% Current Range: 0.1A-1A +/- 0.1A, 1A-20A +/-1%
PHYSICAL PROPERTIES		
Dimensions (L x W x H)		43.24 x 22.04 x 4.40 cm
Weight		2.84 kg
Power Cord Length		3000 cm
ENVIRONMENTAL		
Temperature (Operating / Storage)		0 – 40 °C / -20 – 60 °C
Humidity (Operating & Storage)		0 – 80% RH, Non-Condensing
COMPLIANCE		
EMC Verification		CE, Others by Request
Safety Verification		TUV-CB, CE-LVD, GOST, Others by Request

FSP-PDU17208C



FRONT



REAR

*This product specification sheet is intended to provide an overview of the product. While we strive to ensure the accuracy of the information, there may be spelling, input, or printing errors. Therefore, we are not liable for any such errors. Specifications and information are subject to change without notice.