


Waste No Time



FireCuda 540 SSD Heatsink

Waste No Time

Performance has a new name—FireCuda 540 SSD Heatsink. With speeds up to 10,000MB/s, this PCIe Gen5 takes no-prisoners. Our special design lets you swap between black or white faceplates, while a custom heatsink helps dissipate heat and reduce thermal throttling. And it can handle upwards of 2550TB total bytes written. This SSD isn't for the faint of heart.

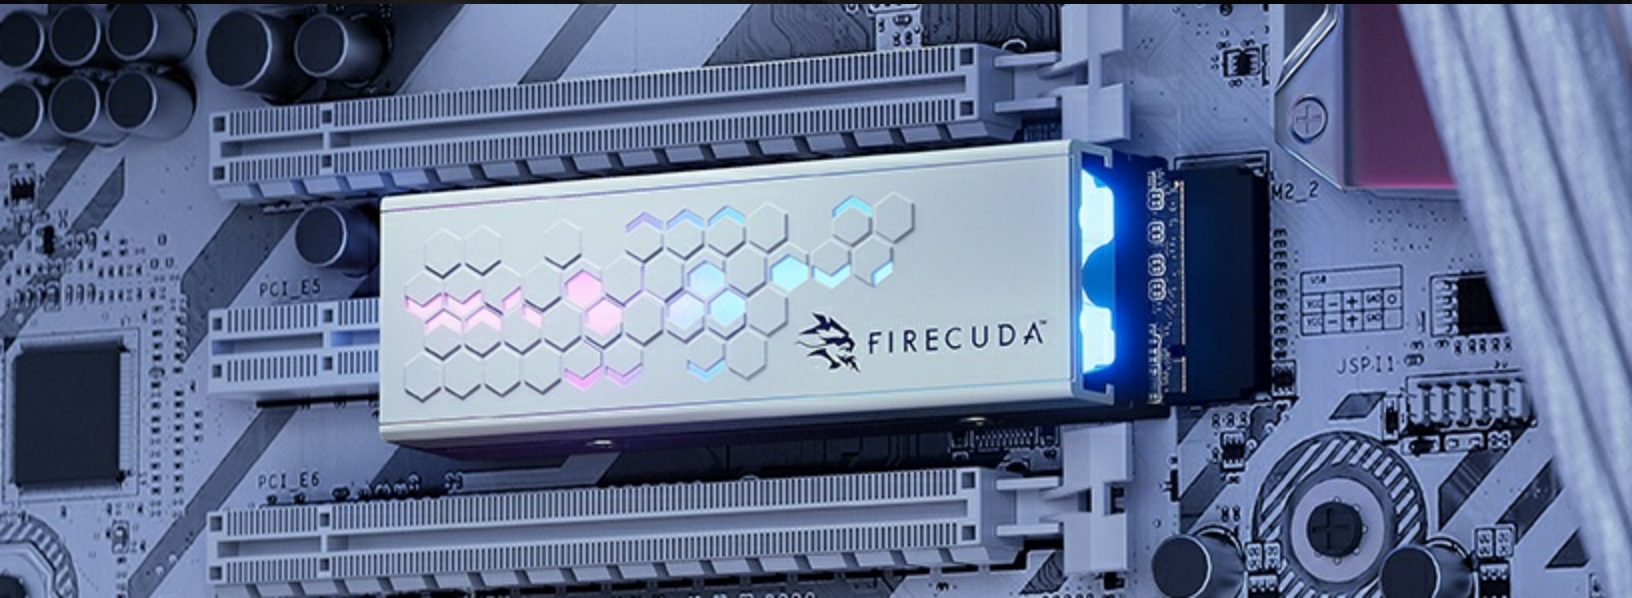

Key Features

Swappable Design

This uniquely designed drive lets you swap between black or white faceplates—choose the one that compliments your PC build best.

Faster. Faster. Faster.

Transfer speeds up to 50% faster than PCIe Gen4 NVMe SSDs and up to 17x faster than SATA SSDs.

Built to Last

Up to 2550TB TBW means you can rewrite 1TB of data every day, for five years (based on 2TB capacity).

Waste No Time



FIRECUDA 540 SSD HEATSINK

Ready to Roll

Plug-and-play compatibility with most PCIe Gen5 motherboards and backwards compatible with PCIe Gen4.

Cool Speeds Ahead

Includes custom built heatsink that helps minimize thermal throttling and maintain peak performance for longer periods of time.

Warranty

Enjoy long-term peace of mind with three years of Rescue Data Recovery Services and a five-year limited warranty.



RETAIL PACKAGING	BOX DIMENSIONS	MASTER CARTON DIMENSIONS	PALLET DIMENSIONS
Length (in/mm)	5.285in/134.25mm	5.079in/129mm	47.992in/1219mm
Width (in/mm)	4.291in/109mm	10.945in/278mm	20in/508mm
Depth (in/mm)	0.945in/24mm	6.654in/169mm	27.795in/706mm
Weight (lb/kg)	0.137lb/0.062kg	2.028lb/0.92kg	104.808lb/47.54kg

QUANTITIES	
Boxes per Master Carton	10
Master Cartons per Pallet	48
Pallet Layers	4

SYSTEM REQUIREMENTS	WHAT'S INCLUDED
<ul style="list-style-type: none">M.2 (M key) slot, PCIe® G4 x4 interface (backwards compatible with PCIe G3 interface)Windows® 10Linux	<ul style="list-style-type: none">FireCuda 540 Gen4 PCIe SSD, 2 faceplate designs, 5v cable, Rescue Data Recovery Service, Quick start guide

REGION	MODEL NUMBER	CAPACITY	LIMITED WARRANTY (YEARS)	UPC CODE	EAN CODE	MULTI-PACK UPC
WW	ZP1000GM3A014	1TB	5	763649177464	8719706433082	10763649177461
WW	ZP2000GM3A014	2TB	5	763649177471	8719706433099	10763649177478

SPECIFICATIONS	2TB	1TB
Standard Model	ZP2000GM30014	ZP1000GM30014
Interface	PCIe Gen5 x4 NVMe	PCIe Gen5 x4 NVMe
NAND Flash Memory	3D TLC	3D TLC
Form Factor	M.2 2280 with heatsink ¹	M.2 2280 with heatsink ¹
PERFORMANCE		
Sequential Read (Max, MB/s), 128KB ²	7300	7300
Sequential Write (Max, MB/s), 128KB ²	6900	6000
Random Read (Max, IOPS), 4KB QD32 T8 ²	1,000,000	800,000
Random Write (Max, IOPS), 4KB QD32 T8 ²	1,000,000	1,000,000
ENDURANCE/RELIABILITY		
Total Bytes Written (TB)	2550	1275
Mean Time Between Failures (MTBF, hours)	1,800,000	1,800,000
Rescue Data Recovery Services (years) ³	3	3
Warranty, Limited (years)	5	5
POWER MANAGEMENT		
Active Power, Average (W)	7.8	6.3
Idle Power PS3, Average (mW)	25	20
Low Power L1.2 mode (mW)	<5	<5
ENVIRONMENTAL		
Temperature, Operating Internal (°C)	0°C – 70°C	0°C – 70°C
Temperature, Nonoperating (°C)	-40°C – 85°C	-40°C – 85°C
Shock, Nonoperating: 0.5ms (Gs)	1500Gs	1500Gs
SPECIAL FEATURES		
TRIM	Yes	Yes
S.M.A.R.T.	Yes	Yes
Halogen Free	Yes	Yes
RoHS Compliance	Yes	Yes
PHYSICAL		
Length (mm/in, max)	80.15mm/3.155in	80.15mm/3.155in
Width (mm/in, max)	24.35mm/0.958in	24.35mm/0.958in
Height (mm/in, max)	18.65mm/0.734in	18.65mm/0.734in
Weight (g/lb)	65.88g/0.145lb	63.96g/0.145lb

¹ Please verify that your system provides enough space for installation. The FireCuda 530 with heatsink exceeds dimensions of a standard M.2 2280 form factor. Heatsink is pre-installed and should not be removed as it can damage the SSD.

² Fresh out of box (FOB) performance obtained on newly formatted drive. Performance may vary based on SSD's firmware version, system hardware, and configuration. Performance based on CrystalDiskMark v.7.0.0 x64 on Windows 10 host with PCIe Gen4 motherboard.

³ Rescue Data Recovery Services not available in all countries.

SEAGATE.COM

© 2023 Seagate Technology LLC. All rights reserved. Seagate, Seagate Technology, and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. FireCuda and the FireCuda logo are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. The PCIe word mark and/or PCIExpress design mark are registered trademarks and/or service marks of PCI-SIG. All other trademarks or registered trademarks are the property of their respective owners. When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Actual data rates may vary depending on operating environment and other factors, such as chosen interface and drive capacity. Seagate reserves the right to change, without notice, product offerings or specifications. DS2121.1-2305